FL-RSSR


Resettable Type Smoke Detector



Characteristics

- Used widely in fire alarm systems or security systems.
- High accuracy IR diode sensor to detect the ambient smoke level more effectively.
- Several power regulators on PCB to stabilize the operation of detectors.
- New design on minified chamber makes so easy for maintenance.






Specifications

Model	FL-RSSR
Voltage Range	12V DC
Standby Current	20uA (pulsing current under 450 uA)
Alarm Current @12V DC	15mA
Sensitivity Setting	Comply to EN 54
Sound	85dB/3M
Ambient Temperature	-10°C ~ +55°C
Material	Fire-proof plastic
Dimensions	102mm(Dia.) x 50mm(H)
Color	White
Weight	135g

Wiring Diagram

FL-RSSR
Relay output :
Contact Ratings
0.8A@30VDC
0.4A@125VAC
(Refer to Security System Application)

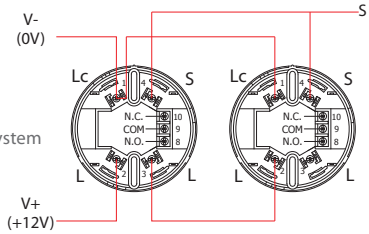

Order information

FL-RSSR	+ Buzzer + Relay Output