


AWWA C515 Resilient seated NRS gate valve-flange end with indicator post flange

Model No. Z45X-04



Name of parts	Material
Body	Ductile iron
Wedg	Ductile iron+EPDM
Stem Nut	Bronze
Stem	SS431 or SS304,SS316,bronze
Bonnet	Ductile iron
Bonnet Gasket	EPDM
Sealing Ring	EPDM
Indicator Post Flange	Ductile iron
Sliding disc	Bronze
Screw	Carbon steel with hot galvanization
O-rings	EPDM
Wrench Nut	Ductile iron

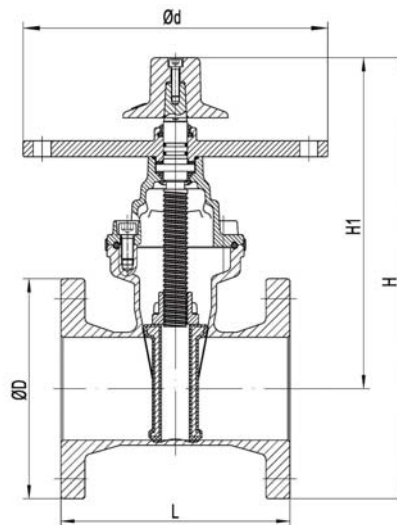

Technical data >

- Sizes: 2" ~ 12"
- Working pressure: 175PSI, 300PSI
- Valve standard: AWWA C515
- Flange standard: ASME-B16.1 Class125
- Temperature range: 0 ~ 80 °C

Dimensions		Pressure rating	Size (mm)				
DN	inch	psi	ΦD	L	H1	H	Φd
100	4	175	229	229	332.5	449	305
		300					
125	5	175	254	254	385	512	305
		300					
150	6	175	279	267	432.5	572	305
		300					
200	8	175	343	292	527	698.5	305
		300					
250	10	175	406	330	645	848	305
		300					
300	12	175	483	356	722	963.5	305
		300					